



Ramp Power GSE, is a company specialized in the manufacture, sale and distribution of ground equipment for the aeronautical industry.

Present throughout the American continent. *Ramp Power GSE*, is innovation in GSE, manufacturing equipment with adjustments for its best use, making fewer personnel safely operate the equipment on the ground.



More than 25 years of experience in ground equipment. Innovating in *GSE* equipment.

Dimensions:

- Chasis built in steel
- Lever brake system on the front wheels
- 4.00 x 8 solid wheels
- Steel draw bar
- Connection hitch
- Bumper in the four upper corners
- High resistance blue canvas
- The tarpaulins can be reinforced and/or chain for added strength
- Load capacity 8000 lbs
- Structural steel bottom frame
- Baked paint finish
- Pall type drag with ring

Shopping Dimensions:

- Length 300 cm. Width 152 cm. Height 200 cm.
- Total weight of equipment 700 kg



Dimensions:

- 2.2 ton load capacity
- Platorm dimensions: 2.64 m x 3.40 m
- Features hitch for hooking drag pull
- Manual brakes to secure the load on the Dolly LD7 platorm
- 84.00 x 8 solid tires
- 28 Galvanized steel rollers
- Finished in polyurethane paint
- Top speed of 32kph

Shipping Dimensions:

- Weight - 2,672 pounds.
- Length (tow bar up) - 138"
- Length (tow bar down) - 179"
- Width - 102"
- Height - 20 1/2"



Dimensions:

- Chassis built with schedule 30 tube.
- Lever brake system.
- Tank made of A 304 stainless steel with a capacity of 470 liters.
- 400 x 8 wheels 1"weaved charging hose WX20 Honda engine
- Gallometer included Steel draw bar with coupling for connection hitch.

Shopping Dimensions:

- Wide: 148cm
- High: 50 cm
- Long: 22 cm

SANITIZED DELIVERY



Features:

- Dolly for containers, wich handles LD1, LD2 and LD3. The entire dolly car is made of high quality steel to be firm and durable; it has a load capacity of 1600 kg.
- The breakes are automatically activated when the tow bar is raised.
- The car has central rotating axis steering
- It can be rotated to any position thanks to its 360° rotating function, so the opeptions is flexible and convenient (optional, additional to the price)
- The spring is equipped with a high security E-shaped rear hitch
- Maintenance is easy and simple
- Baked-on powder coat finishes for long working life.

Shopping Dimensions:

- 3500 m m with everything and drawbar x 1770 m m x 560 m m
- Platform siza 1915m m x 1554 m m
- Roller height 508 m m - 515 m m
- Weight 650 kg
- Load capacity 1600kg
- Towing speed 25km/h



Features:

- Chassis built with Schedule 30 tube Lever brake system
- Tank made of A304 stainless steel for blue water and A403 stainless steel for black water.
- Blue water tank 190 lts.
- Black water tank 350 liters.
- 400 x 8 wheels Discharge hose with coupling nipple Inlet check valve 3/4" braided charge hose 4" discharge hose
- With manual pump or gasoline engine Ball valve for final discharge Gallometer included
- Draw bar of steel with coupling for connection hitch

Shopping Dimensions:

- Length: 300 cm
- Width: 150cm
- Height: 150cm



FEATURES:

LENGTH	8 M - 26.24 ft
STOWED HEIGHT	3.40 M - 11.15ft
WIDE	2.50 M - 8.20ft
EXTENDED HEIGHT	4.40 M - 14.43 ft
WHEELS	4 piezas 400 x 8
SURFACE	Non-slip Baked
WHEELS RANGE	2.40 M a 3.40 M
BRAKES	With two leveling jacks
DEGREE OF SLOPE	11Degree
RAILING HEIGHT	1.00 m
AVERAGE LOAD CAPACITY	700 kg /1540Pounds
AISLE ELEVATION SYSTEM	Through manual with automatic brake and stainless cable.
HYDRAULIC CYLINDER SPECIFICATIONS	De 3 1/2" single action
FABRICATION MATERIAL	In structural steel
FISISHED	Honed paint and polyurethane
MANUFACTURING MATERIALS	Roof and side covers (priced separately)



FEATURES:

LENGTH	600 M
STOWED HEIGHT	3.40 M
WIDE	2.50 M
EXTENDED HEIGHT	4.40 M
WHEELS	4 piezas 400 x 8
SURFACE	Non-slip Baked
WHEELS RANGE	2.40 M a 3.40 M
BRAKES	1.10X 1.15M
DEGREE OFSLOPE	0.32 X 1.16M
RAILING HEIGHT	1.00 m
AVERAGE LOAD CAPACITY	350 kg
AISLE ELEVATION SYSTEM	Through hydraulic cylinder with manual pumping
HYDRAULIC CYLINDER SPECIFICATIONS	De 3 1/2" single action
FABRICATION MATERIAL	In structural steel
FISISHED	Honed paint and polyurethane
MANUFACTURING MATERIALS	Roofing



FEATURES:	
LENGTH	600 M
STOWED HEIGHT	3.40 M
WIDE	2.50 M
EXTENDED HEIGHT	4.40 M
WHEELS	4 piezas 400 x 8
SURFACE	Non-slip Baked
WHEELS RANGE	2.40 M a 3.40 M
BRAKES	1.10X 1.15M
DEGREE OF SLOPE	0.32 X 1.16M
RAILING HEIGHT	1.00 m
AVERAGE LOAD CAPACITY	350 kg
AISLE ELEVATION SYSTEM	Through hydraulic cylinder with manual pumping
HYDRAULIC CYLINDER SPECIFICATIONS	De 3 1/2" single action
FABRICATION MATERIAL	In structural steel
FISISHED	Honed paint and polyurethane
MANUFACTURING MATERIALS	Roofing



Largo de cuerda		
Standard	72	ft
	2,194.56	cm
Maxi	170	ft
	2,590.80	cm
	Peso	kg



SAFEBOX

Largo de cuerda		
Standard	72	ft
	2,194.56	cm
Maxi	170	ft
	2,590.80	cm
	Peso	kg




SAFEPOST

Largo de cuerda		
Standard	144	ft
	4,389.12	cm
Maxi	170	ft
	5,181.60	cm
	Peso	kg



SAFEGUIDE



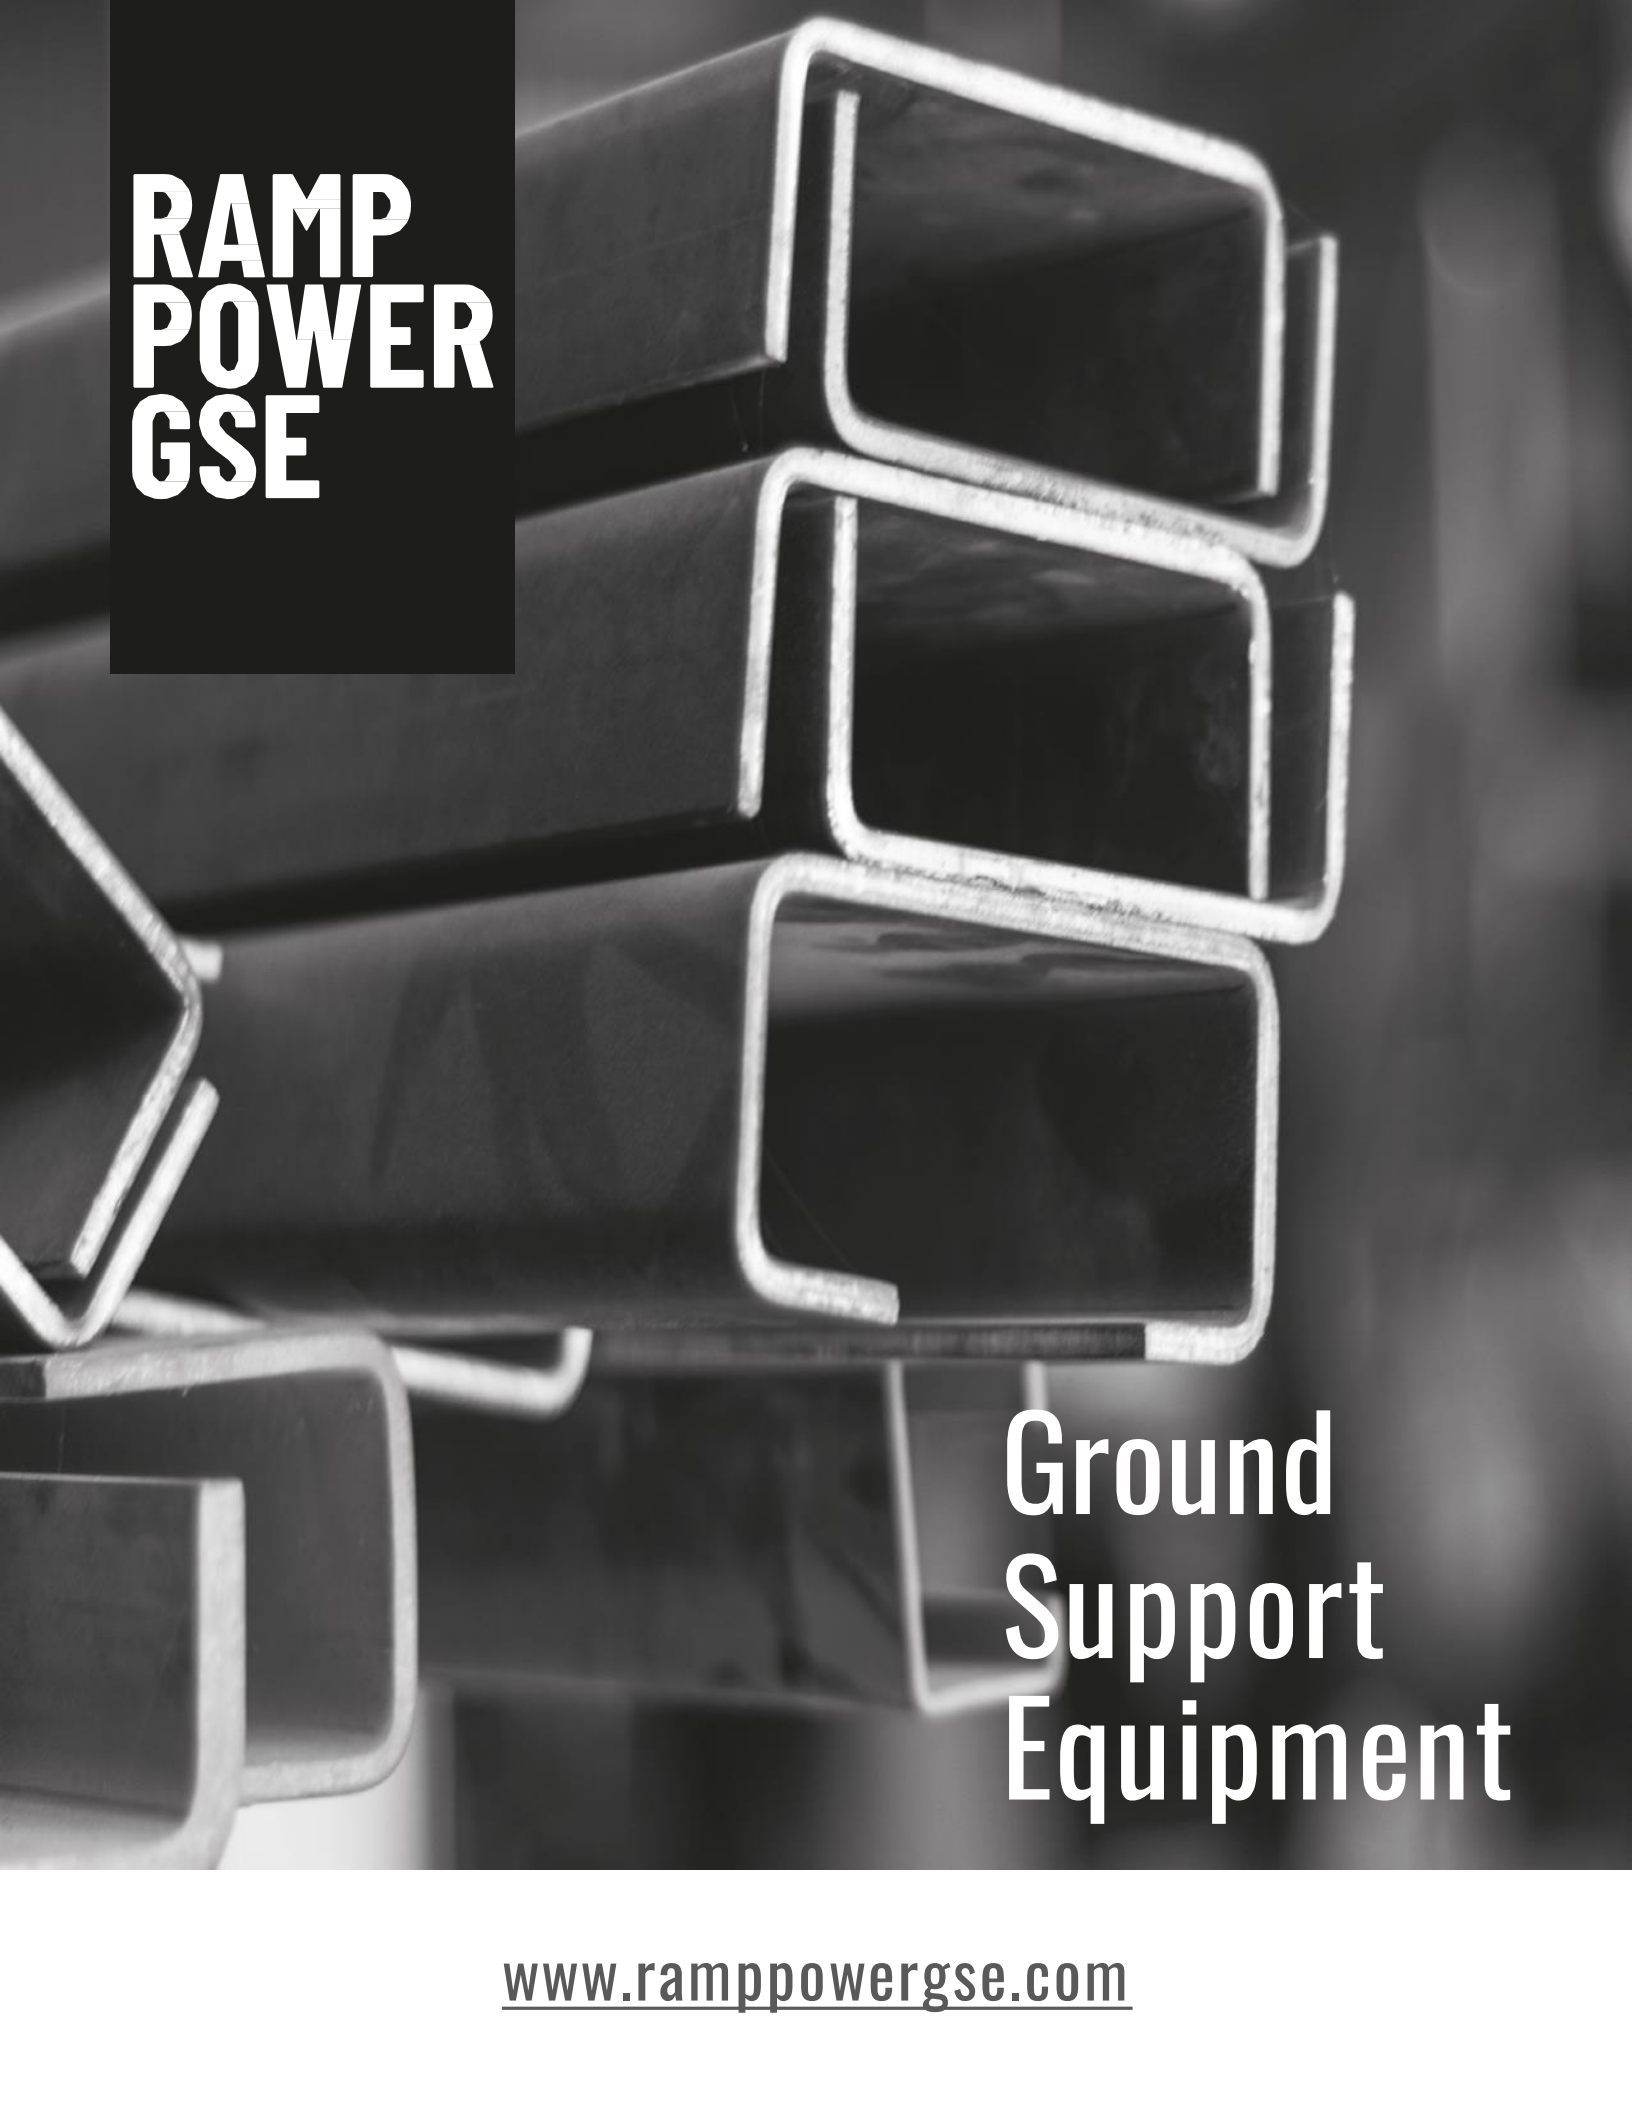

**RAMP
POWER
GSE**

**Ground
Support
Equipment**

www.ramppowergse.com